




深圳市众富包装科技有限公司

SHENZHEN ZHONGFU PACKAGING TECHNOLOGY CO., LTD.

众富包装科技（惠州）有限公司

ZHONGFU PACKAGING TECHNOLOGY (HUI ZHOU) CO.,LTD.

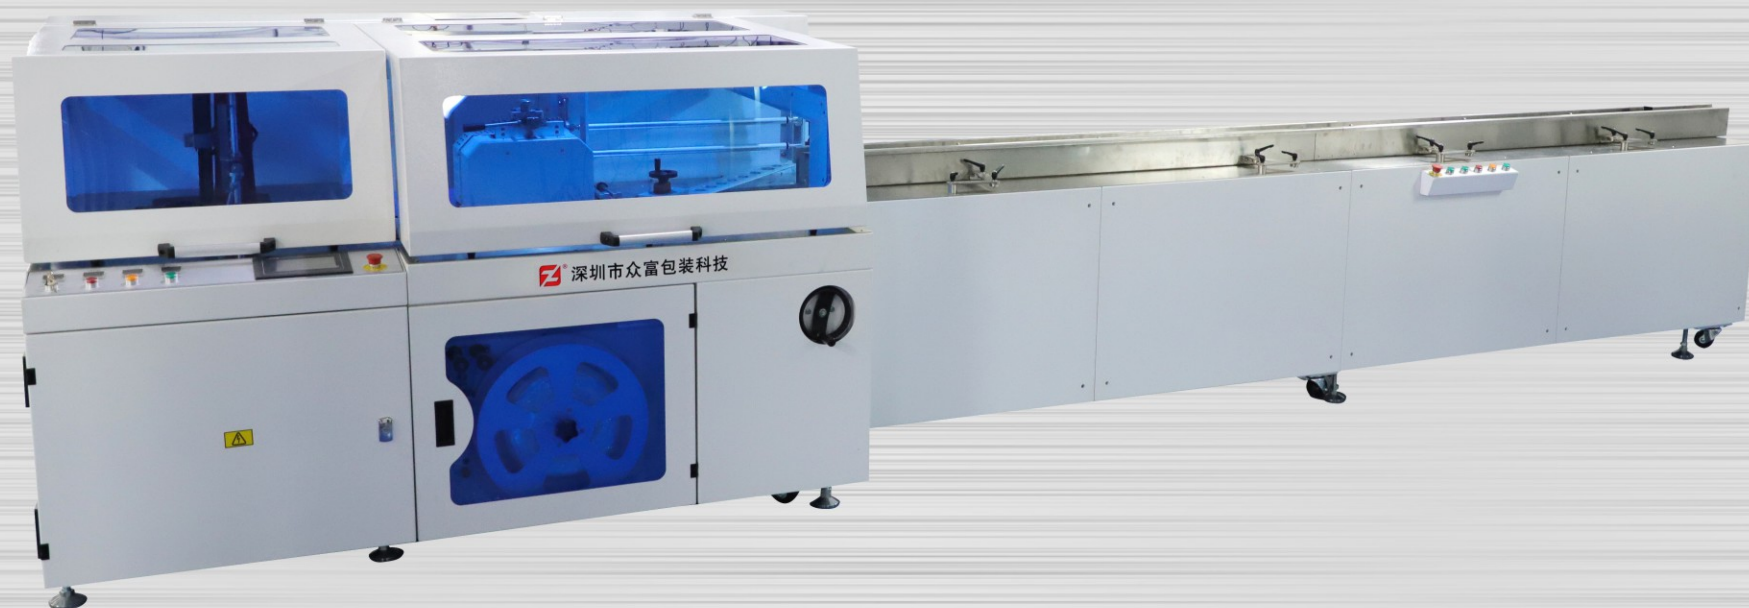

公司简介

Company introduction

深圳市众富包装科技有限公司，自2002年从事包装设备行业，于2014年在广东省深圳市龙岗区正式成立，随着业务的迅速发展，于2024年在惠州市成功扩建第二生产基地，工厂面积超过1万平方米，为公司未来的发展奠定了坚实基础。

作为一家集研发、生产、销售与服务于一体的包装机械设备制造商，众富包装始终坚持以市场需求为导向，以技术创新为核心。我们的产品包括全自动封口机（垂直L型封口机、剪刀L型封口机、边封机、连续式边封机）、收缩机、套标机、贴标机、风琴式包装机、枕式包装机、封箱机、输送机等包装设备。我们还提供包装生产线及非标自动化设备的设计定制服务，以及收缩膜等包装材料的销售，致力于为客户提供一站式的包装解决方案。

“诚信、服务、品质、创新”是众富包装的宗旨。我们坚信，只有以诚信为本，才能赢得客户的信任；只有提供优质的服务，才能满足客户的需求；只有追求高品质的产品，才能赢得市场的认可；只有不断创新，才能引领行业的发展。我们期待与各界合作伙伴携手共进，实现长远的双赢目标。



machines, conveyors and other packaging equipment. We also provide design and customization services for packaging production lines and non-standard automation equipment, as well as sales of packaging materials such as shrink films, committed to providing customers with one-stop packaging solutions.

Integrity, service, quality, and innovation are the principles of Zhongfu Packaging. We firmly believe that only with honesty as the foundation can we win the trust of our customers; Only by providing high-quality services can we meet the needs of our customers; Only by pursuing high-quality products can we win market recognition; Only through continuous innovation can we lead the development of the industry. We look forward to working hand in hand with partners from all walks of life to achieve long-term win-win goals.

Shenzhen Zhongfu Packaging Technology Co., Ltd. has been engaged in the packaging equipment industry since 2002 and was officially established in Longgang District, Shenzhen, Guangdong Province in 2014. With the rapid development of its business, it successfully expanded its second production base in Huizhou City in 2024, with a factory area of over 10000 square meters, laying a solid foundation for the company's future development.

As a packaging machinery equipment manufacturer that integrates research and development, production, sales, and service, Zhongfu Packaging always adheres to market demand orientation and technological innovation as the core. Our products include fully automatic sealing machines (vertical L-shaped sealing machines, scissor L-shaped sealing machines, side sealing machines, continuous side sealing machines), shrinking machines, sleeve labeling machines, labeling machines, spring packaging machines, pillow packaging machines, carton sealing

部分生产车间及展会现场

Partial production workshops and exhibition sites



优秀的团队，专业的服务
Excellent team, professional services

目录

CONTENTS

- 01 垂直式L型全自动封口机ZF-A6345/A6352/A9070
Vertical L type full automatic sealing machine ZF-A6345/A6352/A9070
- 02 剪刀式L型全自动封口机ZF-A5645
Scissors L type full automatic sealing machine ZF-A5645
- 03 全自动连续式边封机ZF-BS500-Z/BF500-Z
Full automatic continue side sealing machine ZF-BS500-Z/BF500-Z
- 04 全自动连续式边封机ZF-BS500-C/ZF-BF500-C
Full automatic continue side sealing machine ZF-BS500-C/ZF-BF500-C
- 05 全自动间歇式边封机ZF-BJ400/ZF-B500
Full automatic intermittent side sealing machine ZF-BJ400/ZF-B500
- 06 全自动间歇式边封机ZF-B800/ZF-B1100
Full automatic intermittent side sealing machine ZF-B800/ZF-B1100
- 07 高效节能型收缩炉ZF-S450/S550/S650/S800
High-efficiency energy-saving shrink heat tunnel ZF-S450/S550/S650/S800
- 08 标准型收缩炉ZF-SJ550/ZF-SJ420/ZF-S400
Standard shrink heat tunnel ZF-SJ550/ZF-SJ420/ZF-S400
- 09 全自动高速平铺包装生产线ZF-A6352 + ZF-S550
Full-automatic high speed flat packing machine ZF-A6352 + ZF-S550
- 10 全自动经济型平铺包装生产线ZF-A5645 + SJ420
Full-automatic economic flat packing machine ZF-A5645 + ZF-SJ420
- 11 全自动筒包装机 ZF-X500-T/X450/X450-S
Full automatic tower packaging machine ZF-X500-T/X450/X450-S
- 12 全自动筒包装机ZF-X400-X/半自动ZF-XJ400-S
Full-automatic cylinder packing machine ZF-X400-X/Semi-automatic ZF-XJ400-S
- 13 全自动组合式筒包装机ZF-XD450/ZF-XD450-S
Full-automatic combined tower packaging machineZF-XD450/ZF-XD450-S


目录

CONTENTS

- 14 全自动单个全密封包装机ZF-Z240/ZF-Z360
Full-automatic single full pack machine ZF-Z240/ZF-Z360
- 15 全自动高速套标机ZF-TT200
Full-automatic high speed labeling packing machine ZF-TT200
- 16 全自动PVC高速套标机ZF-TT90/ZF-TT90-Y
Full-automatic PVC high speed labeling machine ZF-TT90/ZF-TT90-Y
- 17 转盘式套标机ZF-TYP120/ZF-TYP90
Turntable style labeling machine ZF-TYP120/ZF-TYP90
- 18 全自动枕式包装机ZF-Z600XP/ZF-Z450XP
Full-automatic pillow packaging machine ZF-Z600XP/ZF-Z450XP
- 19 全自动风琴式包装机ZF-TH700
Full-automatic spring packaging machine
- 20 半自动风琴包装机ZF-XS700
Semi-automatic spring packaging machine ZF-XS700
- 21 全自动侧面搓滚贴标机ZF-TBC150/全自动平面贴标机ZF-TBP150
Full-automatic side roller labeling machine ZF-TBC150/Fu 11-automatic plain labeling machine ZF-TBP150
- 22 全自动多功能卧式贴标机ZF-TBW400/TBS150
Full-automatic cylinder horizontal labeling machine ZF-TBW400/TBS150
- 23 工字型封箱机
I-Shaped box sealing machine
- 24 自动开箱机
Automatic unpacking machine
- 25 收缩膜
Shrink film
- 26 包装生产线示意图
Sketch map of packaging production line

垂直式L型全自动封口机ZF-A6345/ZF-A6352/ZF-A9070

Vertical L type full automatic sealing machine ZF-A6345/A6352/A9070

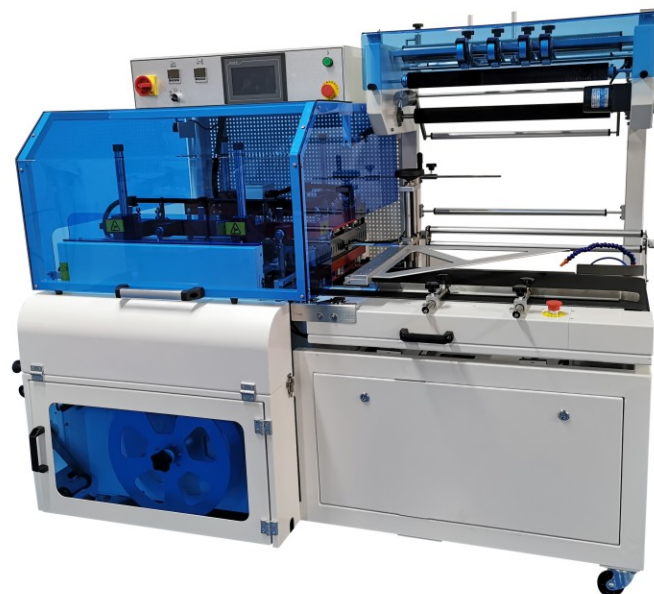

- A、垂直封口设计，封口动作稳定性好，耐用性高，封口线结实、美观。
Vertical sealing design, good sealing action stability, high durability, strong and beautiful sealing line.
- B、刀架有升降功能，封口线可以调节到产品的中间，使包装更顺畅，包装效果更美观。
The knife holder has a lifting function, and the sealing line can be adjusted to the middle of the product, so that the packaging is smoother and the packaging effect is more beautiful.
- C、符合CE要求，有CE认证。
Comply with CE requirements and CE certification.
- D、刀架用实心铝材，封口刀为整体设计，不易变形，封口线结实，封口稳定且速度快
The knife holder is made of solid aluminum, the sealing knife is designed as a whole, which is not easy to deform, the sealing line is strong, the sealing is stable and the speed is fast
- E、三对电眼感应产品，适应范围更广，生产更流畅。
Three pairs of electric eye induction products, with a wider application range and smoother production.
- F、四个封口保护接近开关，更好的保护封刀及产品，实现安全生产。
Four sealing protection proximity switches can better protect the sealing knife and products and realize safe production.
- G、两组刹车组件控制，拉膜部分为变频器控制，运行更稳定，袋长精度高，保证包装效果。
Two sets of brake components are controlled, and the pulling part is controlled by a frequency converter, which makes the operation more stable, and the bag length is high in accuracy to ensure the packaging effect.
- H、严谨的设计、加工、装配，再配合质量稳定的品牌电器，使整机性能稳定，在连续长时间工作下故障率极低，大大提高了工作效率。
Rigorous design, processing, and assembly, coupled with stable quality brand electrical appliances, make the performance of the whole machine stable, and the failure rate is extremely low under continuous long-term work, which greatly improves work efficiency.
- I、触摸屏操作，操作简单。可轻易调节宽度和高度，更换不同规格的产品极为方便。
Touch screen operation, simple operation. The width and height can be easily adjusted, and it is very convenient to change products of different specifications.
- J、打孔装置可以灵活调节，针轮毛刷可以永久使用。
The punching device can flexibly investigate the knots, and the pin wheel brush can be used permanently.
- K、输送带26M/分钟，包装速度最快40-45包/分钟。
The conveyor belt is 26M/min, and the packaging speed is 40-45 bags/min.

适用于：日化产品行业、电子产品行业、食品行业、医疗行业、玩具行业、包装印刷行业、工艺品行业、餐饮行业等收缩包装。

Applicable to: shrink packaging in the daily chemical industry, electronic product industry, food industry, medical industry, toy industry, packaging and printing industry, handicraft industry, catering industry, etc.

主要技术参数 Main technical parameters:

型号Model No	ZF-A6345	ZF-A6352	ZF-A9070
机器尺寸 Machine size L*W*H (mm)	1898*1125*1568	1950*1570*1310	2417*1748*1333
工作气压 Cylinder air consumption	80psi, 6kg/cm ²	80psi, 6kg/cm ²	80psi, 6kg/cm ²
封口刀尺寸 Sealing blade size L*W(mm)	630*465	630*515	900*700
包装产品范围 Product size range L*W*H(mm)	(80-560)*(50-380)*(5-180)	(80-560)*(60-430)*(5-250)	(200-830)*(200-630)*(10-250)
电源及功率 Power	1P/220V/50HZ/2.5 KW	1P/220V/50HZ/3KW	1P/220V/50HZ/4KW
净重 Net weight	650KG	750KG	1200KG

剪刀式L型全自动封口机ZF-A5645

Scissors L type full automatic sealing machine ZF-A5645



- A. 符合CE要求，有CE认证。
It meets CE requirements and has CE certification.
- B. 刀架用实心铝材，封口刀为整体设计，不易变形，封口线结实，封口稳定且速度快。
The knife holder is made of solid aluminum, and the sealing knife is designed as a whole, which is not easy to deform, the sealing line is strong, and the sealing is stable and fast.
- C. 三对电眼感应产品，适应范围更广,生产更流畅。
Three pairs of electric eye induction products, with wider application range and smoother production.
- D. 四个封口保护接近开关，更好的保护封刀及产品，实现安全生产。
Four sealing protection proximity switches can better protect the sealing knife and products and realize safe production.
- E. 四组刹车组件控制，运行更稳定，袋长精度高，保证包装效果。
Controlled by four groups of brake components, the operation is more stable, and the bag length is high in accuracy, ensuring the packaging effect.
- F. 严谨的设计、加工、装配，再配合质量稳定的品牌电器，使整机性能稳定，在连续长时间工作下故障率极低，大大提高了工作效率。
Rigorous design, processing, and assembly, coupled with stable quality brand electrical appliances, make the performance of the whole machine stable, and the failure rate is extremely low under continuous long-term work, which greatly improves work efficiency.
- G. 触摸屏操作，操作简单。可轻易调节宽度和高度，更换不同规格的产品极为方便。
Touch screen operation, simple operation. The width and height can be easily adjusted, and it is very convenient to change products of different specifications.
- H. 打孔装置可以灵活调节,针轮毛刷可以永久使用。
The punching device can flexibly investigate the knots, and the pin wheel brush can be used permanently.
- I. 输送带26M/分钟，包装速度最快40包/分钟。
The conveyor belt is 26M/min, and the packaging speed is the fastest 40 bags/min.

适用于：日化产品行业、电子产品行业、食品行业、医疗行业、玩具行业、包装印刷行业、工艺品行业、餐饮行业等收缩包装。


Applicable to: shrink packaging in the daily chemical industry, electronic product industry, food industry, medical industry, toy industry, packaging and printing industry, handicraft industry, catering industry, etc.

主要技术参数 Main technical parameters:

型号Model No	ZF-A5645	ZF-A5645-S
机器尺寸 Machine size L*W*H (mm)	1795*880*1570	1795*880*1570
工作气压 Cylinder air consumption	80psi, 6kg/cm ²	80psi, 6kg/cm ²
封口刀尺寸 Sealing blade size L*W(mm)	565*460	565*460
包装产品范围 Product size range L*W*H(mm)	(90-450)*(50-350)*(10-120)	(50-450)*(50-350)*(10-120)
电源及功率 Power	1P/220V/50HZ/3 KW	1P/220V/50HZ/3 KW
净重 Net weight	360 KG	360 KG

全自动连续式边封机ZF-BS500-Z/BF500-Z


Full automatic continue side sealing machine ZF-BS500-Z/BF500-Z

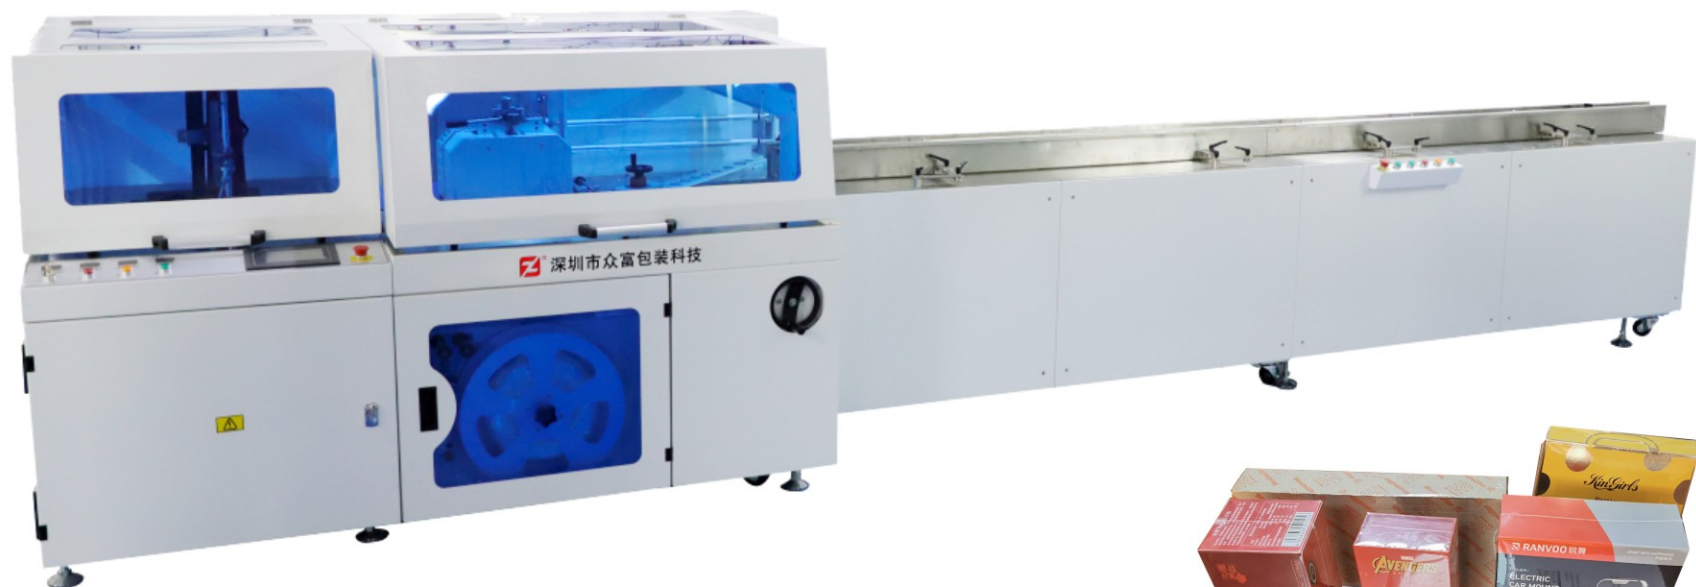

- A、包装速度高达80-120包/分钟
The packaging speed is as high as 80-120 bags/min
- B、前面可根据生产需要选择不同的进料系统
The front can choose different feeding systems according to production needs
- C、输送带可简易地连接现有生产线
The conveyor belt can be easily connected to the existing production line
- D、指推式输送带主要用于包装印刷制品，另可按照客人需要额外配备自动放纸机。
Finger-push conveyor belt is mainly used for packaging and printing products, and it can be equipped with automatic paper feeding machine according to the needs of customers.
- E、导轨推杆式输送带适合组合包装用，可按产品尺寸及形状订制，应用范围广泛。
The guide rail push rod conveyor belt is suitable for combined packaging and can be customized according to the product size and shape, with a wide range of applications.
- F、透过人性化的轻触屏设计，使操作更容易。
The user-friendly touch screen design makes the operation easier.
- G、产品设定参数可便捷地从轻触式显示屏记忆中读取。
Product setting parameters can be conveniently read from the touch screen memory.
- H、边封可以选用新款双压轮边封系统，适应不同的包装膜，封口更稳定，速度更快。
Side sealing can use the new double-pressing wheel side sealing system to adapt to different packaging films, sealing more stable and faster.

全自动连续式边封机ZF-BS500-C/ZF-BF500-C

Full automatic continue side sealing machine ZF-BS500-C/ZF-BF500-C

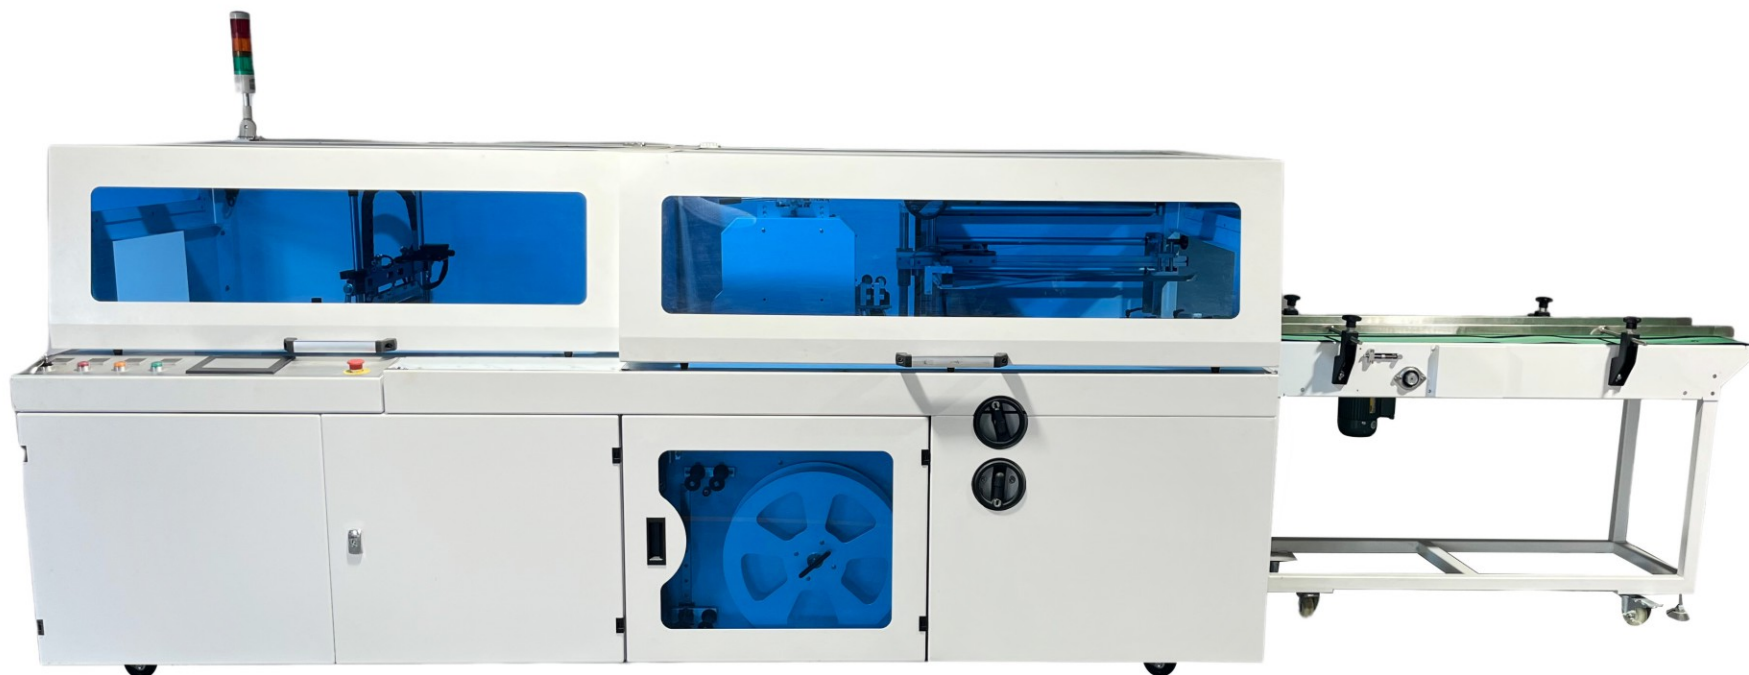

主要技术参数 Main technical parameters::

型号Model No	ZF-BS500-Z	ZF-BF500-Z	ZF-BS500-C	ZF-BF500-C
机器尺寸 Machine size L*W*H (mm)	6180*1675*1360	5374*1720*1376	4030*1630*1366	4030*1630*1366
工作气压 Cylinder air consumption	80psi, 6kg/cm ²	80psi, 6kg/cm ²	80psi, 6kg/cm ²	80psi, 6kg/cm ²
封口刀尺寸 Sealing blade size L*W(mm)	530	530	530	530
包装产品范围 Product size range L*W*H(mm)	70-500*60-400*5-220	70-500*60-400*5-120	70-1000*60-400*5-120	70-1000*60-400*5-120
电源及功率 Power	1P/220V/50HZ/4KW	1P/220V/50HZ/3.2KW	1P/220V/50HZ/3.2KW	1P/220V/50HZ/3.2KW
净重 Net weight	1850KG	1750KG	1450KG	1450KG

全自动间歇式边封机ZF-BJ400/ZF-B500


Full automatic intermittent side sealing machine ZF-BJ400/ZF-B500



- A、包装产品没有长度限制。
There is no length limit for packaged products.
- B、封口线可按需要调节在产品中间，达至最佳封切效果。
The sealing line can be adjusted in the middle of the product as required to achieve the best sealing and cutting effect.
- C、封口线平整，可以使用不同品牌的收缩膜
The sealing line is flat, and different brands of shrink film can be used
- D、最高可达50包/分钟。
Max speed 50 packs/minute.
- E、输送带速度可以配合不同生产需要自行调节。
The speed of the conveyor belt can be adjusted according to different production needs.
- F、打孔装置可以灵活调较，针轮毛刷永久使用。
The punching device can be adjusted flexibly, and the pin wheel brush can be used permanently.

全自动间歇式边封机ZF-B800/ZF-B1100

Full automatic intermittent side sealing machine ZF-B800/ZF-B1100

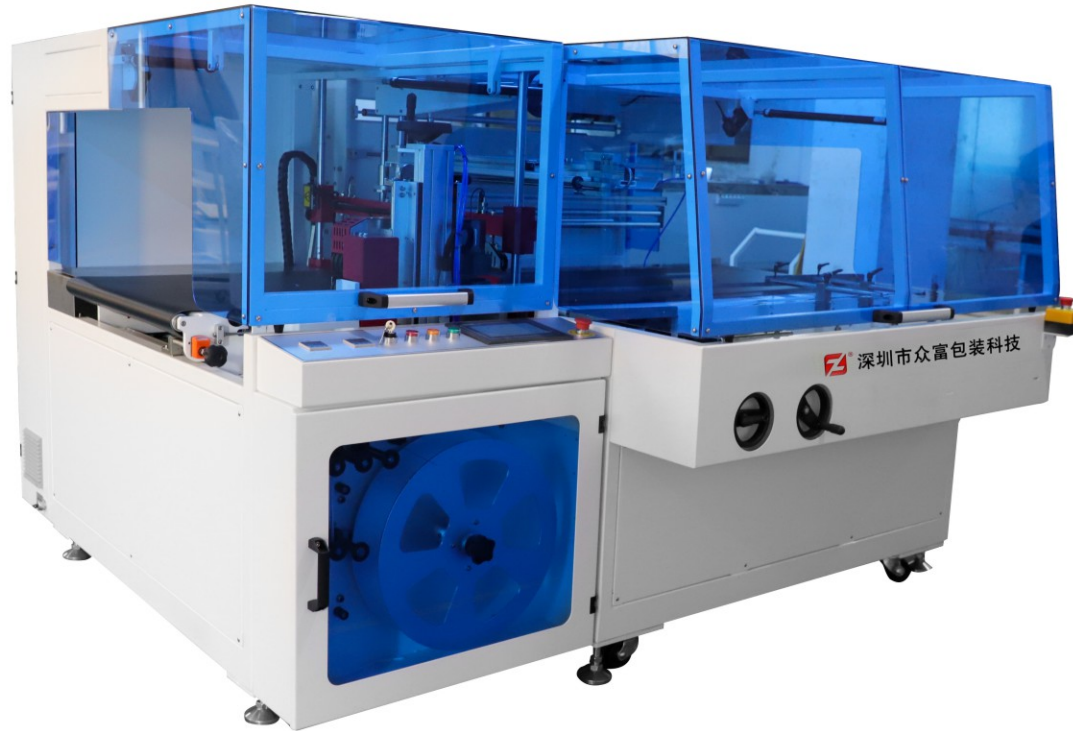


主要技术参数 Main technical parameters:

型号Model No	ZF-BJ400	ZF-B500	ZF-B800	ZF-B1100
机器尺寸 Machine size L*W*H (mm)	1800*940*1670	1810*1652*1343	2245*2185*1483	2530*2765*1490
工作气压 Cylinder air consumption	80psi, 6kg/cm ²	80psi, 6kg/cm ²	80psi, 6kg/cm ²	80psi, 6kg/cm ²
封口刀尺寸 Sealing blade size L*W(mm)	400	530	840	1140
包装产品范围 Product size range L*W*H(mm)	100-无限长*50-320*5-180	100-无限长*50-420*5-180	200-无限长*300-700*5-180	300-无限长*500-1020*5-180
电源及功率 Power	1P/220V/50HZ/1.3KW	1P/220V/50HZ/2.5KW	1P/220V/50HZ/3.8KW	1P/220V/50HZ/3.8KW
净重 Net weight	530KG	880KG	1200KG	1500KG

高效节能型收缩炉ZF-S450/S550/S650/S800

High-efficiency energy-saving shrink heat tunnel ZF-S450/S550/S650/S800

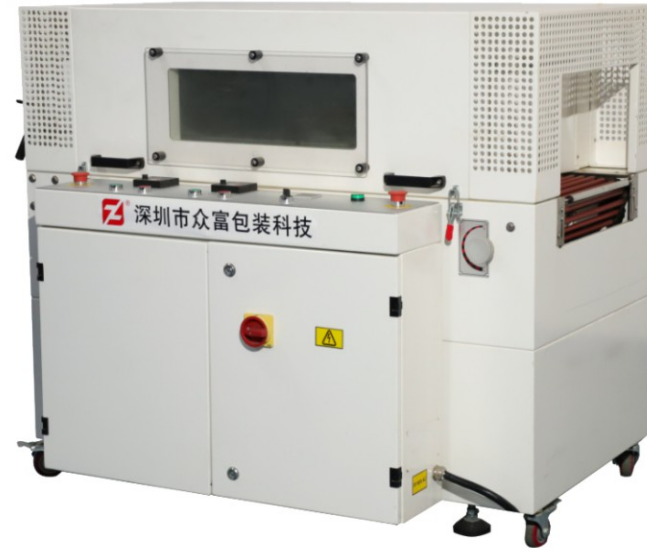

- A、下风循环风机系统设计，开窗口设计。
Downwind circulation fan system design, window design.
- B、三层板设计，保温层厚100MM，整机重550公斤，保温效果好。
Three-layer board design, insulation thickness of 100mm, weight of the whole machine 550 kg, good insulation effect.
- C、风力及热量在炉内循环，大大节省了热能，加热快。
Wind and heat circulate in the furnace, which greatly saves heat energy and heats up quickly
- D、风力大小，方向和输送速度都可以调节，收缩效果更完美。
Wind power, direction and conveying speed can be adjusted, the shrinking effect is more perfect
- E、操作简单，温度自动控制，温度可控制在正负1度以内。
Simple operation, automatic temperature control, the temperature can be controlled within plus or minus 1 degree
- F、整机非常节能，较其他普通收缩机节能2-3KW/H。
The whole machine is very energy-saving, 2-3KW/H energy-saving compared with other ordinary shrinking machines.
- G、主要电器发热管、风机马达保修10年。
The main electrical heating pipes, fan motors are guaranteed for 10 years.

标准型收缩炉ZF-SJ550/ZF-S400/ZF-SJ420

Standard shrink heat tunnel ZF-SJ550/ZF-S400/ZF-SJ420




主要技术参数 Main technical parameters:

型号Model No	ZF-S450	ZF-S550	ZF-S650	ZF-S800	ZF-SJ550	ZF-S400	ZF-SJ420
包装速度Speed	0-35m/min	0-35/min	0-35m/min	0-35/min	0-30m/min	0-30m/min	0-30m/min
收缩槽尺寸 Shrinkage size	1000 *450* 250	1500 *540 *350	1700*630*350	1700*700*280	1500 *540 *350	800 *850 *1120	1000 *420 *250
电源及功率 Power	380V/50HZ /9.6Kw	380V/50HZ /16KW	380V/50HZ/19KW	380V/50HZ/22KW	380V/50HZ /14Kw	380V/50HZ /6.5Kw	380V/50HZ /10Kw
机器尺寸 Machine size	1300 *920 *1130	2000*1070*1230	2200*1200*1230	2200*1250*1130	1900*1070*1330	800*380*200	1200*667*750
净重 Net weight	350KG	550KG	630KG	650KG	500KG	280KG	260KG

全自动高速平铺包装生产线ZF-A6352 + ZF-S550

Full-automatic high speed flat packing machine ZF-A6352 + ZF-S550

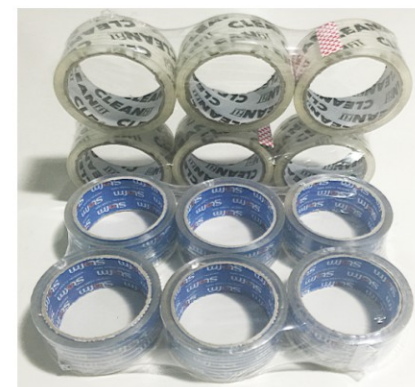

基本用途Basic Use :

主要用于OPP封箱胶带平铺包装，可生产6卷、4卷、3卷、2卷的组合包装及单个包装，也可用于包装布基、铝铂、网格等胶带

It should be mainly used in OPP tape with flat packing, and can produce 6 volumes, 4 volumes, 3 volumes, 2 rolls of combined packaging and single roll packaging. It can also be used for packing

产品特点Product characteristics :

- 封口机为最新专利设计，垂直封口设计，四柱封口结构，刀架采用实心铝材，封口刀为整体设计；封口稳定，速度快。
- Blade is the newest patent design, Vertical sealing designed, blade rest using the solid aluminum with the sealing blade designed as the system.
- 6卷平铺包装速度最快可达35包/分钟。单个包装速度最快可达40包/分钟
- 6 rolls of flat paved packaging can be as fast as 35 packs per minute, 40 packs/min for single roll.
- 可轻易调节宽度，不需要使用任何工具，能够快速更换所需尺寸
- It is easy to adjust the width and do not need any tools to change the required size quickly.
- 收缩炉为高效节能型，风力大，收缩温度低，使产品在热收缩过程中受热均匀，收缩效果更完美
- The shrinkage furnace is efficient and energy saving, with high wind power, low shrinkage temperature and power consumption.
- 圆盘及输送带全部采用不粘胶铁氟龙材料，永不粘胶，且耐用
- The disk and push product belt are all made of non viscose Teflon material, which will never be viscose and durable.
- 能够连接在全自动分条机和手动分条机后面，实现后段自动包装
- It can realize unmanned operation by connecting an automatic slitting machine to a manual one.

主要技术参数 Main technical parameters: :

型号Model No	ZF-P1600	ZF-U450-XG	ZF-A6352	ZF-S550
收缩槽尺寸 Shrinkage slot size	—	—	—	1500*540*350
工作气压 Cylinder air consumption	—	—	80psi, 6kg/cm ²	—
封口刀尺寸 Blade size	—	—	630x520	—
包装物尺寸范围 Packing material size	150x2	150x2	80~550*50~459*2~250	400 (W) *300 (H)
电源及功率 Power	1P 220V/50HZ/0.2KW	1P 220V/50HZ/0.3KW	1P 220V/50HZ/2.5KW	3P 380V/50HZ/16KW
机器尺寸 Machine size	1756*1725*1145	2010*774*1185	1950*1570*1310	2000*1070*1230
净重 Net weight	290KG	260KG	750KG	550KG

全自动经济型平铺包装生产线 ZF-A5645+ZF-SJ420

Full-automatic economic flat packing machine ZF-A5645+ZF-SJ420



基本用途Basic Use :

主要应于OPP封箱胶带平铺包装，可8卷、6卷、4卷、2卷的组合包装及单个包装，也可包装布基，铝钳，网格胶带等。

It should be mainly used in OPP packing tape packing, and can produce 8 volumes, 6 volumes, 4 volumes, 2 rolls of combined packaging and single roll packaging. It can also be used for packing cloth substrates, aluminum platinum, grid tape and so on.

产品特点Product characteristics :

- 6卷平铺包装速度最快可达20包/分钟，单个包装最快可达35包/分钟
- 6 rolls of flat paved packaging can be as fast as 20 packs per minute, 35 packs/min for single roll.
- 可轻易调整宽度，不需要任何工具，能够快速更换至所需尺寸
- It is easy to adjust the width and do not need any tools to change the required size quickly.
- 刀架用实心铝材，封口刀整体设计，不易变形，封口稳定，封口速度快
- With blade rest using the solid aluminum, the sealing blade is designed for integral knife and it is not easy to deform. Sealing position is stable and the sealing & cutting speed is fast
- 收缩炉可选配高效节能型，更节省用电
- High efficiency and energy saving shrinkage furnace can be selected to save electricity.
- 圆盘及推料输送带采用不粘胶铁氟龙材料，永不粘胶，且耐用
- The disk and push product belt are all made of non viscose Teflon material, which will never be viscose and durable.
- 能够连接在全自动分条机和手动分条机的后面，实现中间无人化操作
- It can realize unmanned operation by connecting an automatic slitting machine to a manual one.

主要技术参数 Main technical parameters :

型号Model No	ZF-P1600	ZF-CH450-1200	ZF-A5645	ZF-SJ420
收缩槽尺寸 Shrinkage slot size	—	—	—	1000x420x250
工作气压 Cylinder air consumption	—	—	80psi, 6kg/cm ²	—
封口刀尺寸 Blade size	—	—	565x460	—
包装物尺寸范围 Packing material size	150×2	150×2	(90~450) x (50~350) x (10~120)	300(W)x 200(H)
电源及功率Power	1P 220V/50HZ/0.2KW	1P 220V/50HZ /0.1KW	1P 220V/50HZ /2.2KW	3P 380V/50HZ /10KW
机器尺寸 Machine size	1773x1725x1145	2100x774x1185	1795x880x1570	1200x667x750
净重 Net weight	290KG	150KG	360KG	260KG

全自动筒包装机ZF-X500-T/X450/X450-S

Full automatic tower packaging machine ZF-X500-T/X450/X450-S



基本用途 Basic Use :

筒包装机是针对OPP封箱胶带，文具胶带，PVC电工胶带，美纹纸和双面胶等产品的整筒包装

The cylinder packer is designed for OPP packing tape, stationery tape, PVC electrical tape, textured paper and double-sided adhesive.

产品特点 Product characteristic :

符合CE要求，有CE认证。

It meets the requirements of CE and has CE certification.

最新专利设计，可调式推板，适合包装不同宽度的产品；

The latest patent design, adjustable push plate, suitable for packaging products of different widths;

包装速度最快可达18-22筒/分钟

The fastest packing speed can realize 18-22 barrels per minute.

封口刀采用特殊材料加工设计，整体封口刀，不易变形，耐用，封口线结实，整洁，可同时适用POF,PVC和PE膜

Sealing knife is especially designed. The sealing line is strong and clean, applicable for PVC, POF and PE film packaging.

输送皮带采用摩擦力小的片基带，不会磨伤胶带表面，且耐用

The conveyor belt uses a small friction baseband, which does not rub the surface of the adhesive tape and is durable.

输送长度可以根据生产需求定制，长输送带可一次性放较多产品，上料轻松

Transportation length can be customized according to production need, long conveyor belt can be put more products in one time.

当胶带直径较大时，可加预推功能，提高机器的功效及稳定

When the diameter of the tape is larger, the pre push function can be added to improved the efficiency and stability of the machine.

能够连接全自动分条机和手动分条机的后面，实现中间无人操作。

It can be connected to the rear of the full automatic slitting machine and manual slitting machine to realize the unmanned operation in the middle.

全自动筒包装机ZF-X400-X/XT/ 半自动ZF-XJ400-S

Full-automatic cylinder packing machine ZF-X400-X/XT/ Semi-automatic ZF-XJ400-S



基本用途 Basic Use :

OPP封箱胶带、美纹纸、双面胶、网格带、和纸胶带，适合单卷及整筒包装

It is for OPP packing tape, stationery tape, PVC electrical tape, textured paper and double-sided adhesive.

ZF-X400-XT 用于连接全自动分条机使用，实现生产和包装整线自动化。

ZF-X400-XT is used to connect with the automatic slitting machine to realize automatic produce and packaging.

ZF-XJ400-S适用单个筒包，两头放标，操作简单，高效率，最快可达30-35包/分钟

ZF-XJ400-S is for the single roll pack and two tops labeling. It is easy to operate and efficient and fastest speed is 30-35packs/min

同时适用包装多规格产品，调节方便，操作简单。

And also for the many kinds of the tape. It is easy to adjust and operate.

主要技术参数 Main technical parameters:

型号Model No	ZF-X500T	ZF-X450	ZF-X450-S	ZF-X400-X/XT	ZF-XJ400-S
最大包装尺寸 Max product size	W(200-360)*Φ(80-200)	W(200~360)*Φ(80~130)	W(120-200)*Φ(40-80)	W(200-360)*Φ(40-130)	W(40-360)*Φ(40-200)
工作气压 Cylinder air consumption	80psi, 6kg/cm ²	80psi, 6kg/cm ²	80psi, 6kg/cm ²	80psi, 6kg/cm ²	80psi, 6kg/cm ²
包装速度 Speed	18-20筒	20-22筒	28-32筒	24-26筒	25-35筒
电源及功率 Power	220V/50HZ /1.7KW	220V/150HZ /1.2KW	220V/50HZ /1.5KW	220V/50HZ /2.5KW	220V/50HZ /2.5KW
机器尺寸 Machine size	2447 x 1225 x 1607	3115 x 1225 x 1607	3115 x 1137 x 1607	3015 x 1110 x 1607	865 x 970 x 1610
净重 Net weight	380KG	350KG	350KG	350KG	190KG

全自动组合式筒包装机 ZF-XD450/ZF-XD450-S

Full-automatic combined tower packaging machine ZF-XD450/ZF-XD450-S



基本用途Basic Use :

主要用于多卷胶带自动排列、自动竖立组成筒包装。

It is mainly used for automatic arrangement and vertical standing of multi-roll tape.

产品特点Product characteristics :

ZF-XD450封箱胶带组合筒包装机

ZF-XD450 BOPP combined tower packaging machine.

- 最新专利设计，胶带成筒自动排列传送机构。
- The newest patent design, making the arrangement of the tapes as a tower through the feeding device.
- 可实现4卷、5卷、6卷封箱胶带的筒包，更换模具即可包装不同宽度的产品
- It can realize 4 volumes, 5 volumes, 6 volumes of combined tapes packaging and it adapts for different width size by the tool adjustment.
- 可连接全自动分条机及套标机，实现自动包装，节省人工提高生产效率
- It can be connected to the rear of the full-automatic slitting machine and manual slitting machine to realize the unmanned operation and save the labor to improve the production efficiency
- 最快速度可达到13-15筒/分钟
- The fastest packing speed can reach 13-15 barrels per minutes

ZF-XD450-S 文具及PVC电工胶带组合筒包装机

ZF-XD450-S stationery and PVC electrical combined tapes cylinder packaging machine

- 可实现8卷、10卷、12卷文具及PVC电工胶带的筒包，宽度在16-20之间无需更换模具，可连接套标机，实现自动包装，节省人工提高生产效率
- It can realize 8 volumes, 10 volumes, 12 volumes of stationery tape or PVC electrical combined tapes cylinder packaging and it adapts for different width size by the tool adjustment.
- 可连接套标机，实现自动包装，节省人工提高生产效率
- Connecting labeling machine, realizing automatic packaging, saving labor and improving production efficiency

主要技术参数 Main technical parameters: :

型号Model No	ZF-XD450	ZF-XD450-S
适用产品高度 Height of tape	45-72	16-20
工作气压 Cylinder air consumption	80psi, 6kg/cm ²	80psi, 6kg/cm ²
包装产品卷数 number of one tower	4、5、6	8、10、12
电压及功率 Power	1P 220V/50HZ /1.7Kw	1P 220V/50HZ /1.3Kw
包装速度/分 Speed	12-15筒/tower	12筒
机器尺寸 Machine size	3692(L)*3135(W)*1605(H)(mm)	3520(L)*1860 (W)*1(H)(mm)
包装产品类别 tape kind	多卷组合成筒包(封箱胶带、布基胶带等)Tower pack for BOPP, cloth tape	多卷组合成筒包(PVC电工胶带和纸胶带等)Tower pack for PVC, paper tape
净重 Net weight	610KG	560KG

全自动单个全密封包装机 ZF-Z240/ZF-Z360

Full-automatic single full pack machine ZF-Z240/ZF-Z360



- A、包装速度高达80-100包/分钟
- A. The packaging speed is up to 80-100 bags/min
- B、前面可根据生产需要选择不同的进料系统
- B. The front can choose different feeding systems according to production needs
- C、输送带可简易地连接现有生产线
- C. The conveyor belt can be easily connected to the existing production line
- D、指推式输送带主要用于包装印刷制品，另可按照客人需要额外配备自动放纸机。
- D. Finger-push conveyor belt is mainly used for packaging and printing products, and it can be equipped with automatic paper feeding machine according to the needs of customers.
- E、导轨推杆式输送带适合组合包装用，可按产品尺寸及形状订制，应用范围广泛。
- E. The guide rail push rod conveyor belt is suitable for combined packaging and can be customized according to the product size and shape, with a wide range of applications.
- F、透过人性化的轻触屏设计，使操作更容易
- F. Through the humanized touch screen design, the operation is easier
- G、产品设定参数可便捷地从轻触屏显示屏记忆中读取。
- G. Product setting parameters can be conveniently read from the touch screen memory.
- H、边封可以选用新款双压轮边封系统，适应不同的包装膜，封口更稳定，速度更快。
- H. Side sealing can use the new double-pressing wheel side sealing system to adapt to different packaging films, sealing more stable and faster.

主要技术参数 Main technical parameters: :

型号Model No	ZF-240	ZF-360
机器尺寸 Machine size L*W*H (mm)	5020 x 1190 x 1650mm	6370 x 1190 x 1650mm
工作气压 Cylinder air consumption	80psi, 6kg/cm ²	80psi, 6kg/cm ²
封口刀尺寸 Sealing blade size L*W(mm)	240	360
包装产品范围 Product size range L*W*H(mm)	100 - 300*40 - 100 *20 - 100	100 - 300*40 - 250*2 - 100
电源及功率 Power	1P/220V/50HZ /6.5Kw	1P/220V/50HZ /6.5Kw
净重 Net weight	1500KG	1600KG

全自动高速套标机 ZF-TT200

Full-automatic high speed labeling packing machine ZF-TT200



基本用途Basic Use :

全自动高速套标机主要用于包装单卷OPP胶带，布基，美纹纸，双面胶，网格，铝铂；PVC电工胶带，和纸胶带等
It is used for the single OPP tape, cloth tape, masking tape, double-adhesive tape, mesh tape, aluminum tape, PVC tape, paper tape.

产品特点Product characteristics :

- 本机型共三项专利技术；There are three patent technology about this set.
- 全罩式304#不锈钢主机：全机防水不生锈
- All cover 304# stainless steel waterproof host machine does not rust;
- 六轴刀盘，独创回旋切断，切断面平整
- Six axis cutter head, unique cyclotron cutting, cutting surface leveling
- 双定位式中心导柱：标签导送更加稳定
- Double positioning center guide post makes label guide delivery is more stable;
- 最新专利设计，自动上料及自动放纸卡，最快速度可达100-120包/分钟，大大节省了人工成本；
- The newest patent design, with automatic feeding and automatic discharge card, the fastest speed can be up 100-120 packs per minute, greatly saving the labor cost.
- 最新专利设计，增加撑膜装置，更换不同直径产品时，无需调节模具高度，只需调节撑膜手轮，操作快速方便；
- The newest patent design, adding the device of holding film. It is not necessary to adjust the height of the tool when changing the different diameter of the tape. Only adjust the hand-wheel of the holding film and it is easy to operate quickly.
- 标签刷下组改为两组分开控制，套标精度更加准确
- Separated control of the bottom set of label brush: a more precision for casting label.
- 套标采用两组电眼识别，防止误套及空套，且调节生产速度后，系统自动调节参数，无需再次调节，操作更方便
- Double electrical eye realizing, prevent wrong labeling or missing labeling. And system parameter will adjust by itself when the new speed adjusted and it is not need to adjust again, easy to operate.
- 特殊设计热内风循环节能收缩炉，收缩效果佳，可配套多种包装生产线使用
- The specially designed hot air circulation shrinkage furnace is good at shrinkage, energy saving, and can be used for a variety of packaging production line.
- 有追色功能，可套印刷标签
- Function to realize the color and it can be used with the printed film.

主要技术参数 Main technical parameters::

型号 Model No	ZF-TT200
适用产品范围直径x高度 Product diameter x height	(85-150) x (12-80)
工作气压 Cylinder air consumption	80psi, 6kg/cm ²
电压及功率 Power	3P 380V/50HZ /13KW
套标速度/分钟 Speed /min	100-120包/packs
机器尺寸 Machine size	11050 x 2237 x 2100
包装产品类别 product kinds	单个包装（封箱胶带、布基、美纹纸、双面胶） single roll (OPP, cloth, masking, double-adhesive tape)
净重 Net weight	1500KG

全自动PVC高速套标机ZF-TT90/ZF-TT90-Y

Full-automatic PVC high speed labeling machine ZF-TT90/ZF-TT90-Y



基本用途Basic Use :

ZF-TT90为PVC电工胶带单卷包装专用套标机,也可以包装单卷文具胶带,和纸胶带等,可连接10卷组合自动包装,自动检测剔除不良品更加节省人工,提高后段包装效率。

ZF-TT90 is PVC special tape labeling machine for electrical tape. It can also pack single roll stationery tape, paper tape and so on. It can connect 10 volumes of combination packaging machine, saving more labor and improve production efficiency.

产品特点Product characteristics :

- 最新专利产品,采用四组吸嘴,吸标更稳定,最快一分钟120卷/分钟
- The latest patented product adopts four sets of suction mouths. The suction standard is stable, and the fastest speed reaches 120 volumes/min.
- 双定位式中心导柱:标签导送更加稳定
- Double positioning center guide post makes label guide delivery is more stable ;
- 采用最新设计,增加撑膜装置,更换不同直径产品时,无需调节模具高度,只需调节撑膜手轮,操作快速方便
- Using the latest design to increase the bracing device, When replacing different diameter product, it is necessary to adjust the die height without adjusting the hand wheel, which is fast and convenient.
- 标签刷下组为两组分开控制:套标精度更准确
- Separated control of the bottom set of label brush: a more precision for casting label.
- 套标采用两组电眼识别,防止误套及空套,且调节生产速度后,系统自动调节参数,无需再次调节,操作更方便
- Double electrical eye realizing, prevent wrong labeling or missing labeling. And system parameter will adjust by itself when the new speed adjusted and it is not need to adjust again, easy to operate.
- 特殊设计热内风风枪收缩,收缩效果佳,且不会损坏不耐高温的产品,采用进口发热芯,使用寿命长
- The specially designed hot air circulation shrinkage furnace is good at shrinkage, energy saving, and can be used for a variety of packaging production line.
- 有追色功能,可套印刷标签
- Function to realize the color and it can be used with the printed film.

主要技术参数 Main technical parameters: :

型号Model No	ZF-TTA80	ZF-TT90	ZF-TT90-Y
适用产品范围直径x高度 Product diameter x height	(40-80)×(50-180)	(40-80)×(12-40)	(85-140)×(12-80)
工作气压 Cylinder air consumption	80psi, 6kg/cm ²	80psi, 6kg/cm ²	80psi, 6kg/cm ²
电压及功率 Power	3P 380V 50HZ /13KW	3P 380V 50HZ /10KW	3P 380V 50HZ /10KW
套标速度/分钟 Speed	25-30筒/packs	100-140卷/rolls	60-70卷/rolls
机器尺寸 Machine size	9140 x 1050 x 2190	8600 x 1900 x 2095	7960 x 1840 x 2095
包装产品类别 packed kinds	整筒文具、和纸包装 stationery tower , paper	单个PVC胶带或文具胶带 Single PVC /stationery	单个包装 (封箱胶带、布基、美纹纸、双面胶) single roll (OPP, cloth, masking, double-adhesive tape)
净重 Net weight	1500KG	1400KG	1200KG

转盘式套标机 ZF-TYP120/ZF-TYP90

Turntable style labeling machine ZF-TYP120/ZF-TYP90



基本用途Basic Use :

转盘式用于单卷OPP胶带，布基，美纹纸，双面胶，网格，铝铂；PVC电工胶带，和纸胶带等。

It is for the single OPP roll, cloth tape, masking tape, double adhesive tape, mesh tape, aluminum tape, PVC tape and paper tape.

产品特点Product characteristics :

- 最新专利设计，自动上料，加自动放纸卡，最快速度可达70包/分钟，大大节省了人工成本；
- The newest patent design, automatic feeding, labeling and the max speed is 70 packs/min, saving the labor
- 双定位式中心导柱：标签导送更加稳定
- Double positioning center guide post makes label guide delivery is more stable ;
- 采用最新专利设计，增加撑膜装置，更换不同直径产品时，无需调节模具高度，只需调节撑膜手轮，操作快速方便
- Using the newest patent design to increase the bracing device, When replacing different diameter product, it is necessary to adjust the die height without adjusting the hand wheel, which is fast and convenient
- 标签刷下组为两组分开控制：套标精度更准确
- Separated control of the bottom set of label brush: a more precision for casting label.
- 套标采用两组电眼识别，防止误套及空套，且调节生产速度后，系统自动调节参数，无需再次调节，操作更方便
- Electrical eye realizing, prevent wrong labeling or missing labeling. And system parameter will adjust by itself when the new speed adjusted and it is not need to adjust again, easy to operate.
- 有追色功能，可套印刷标签
- Function to realize the color and it can be used with the printed film.

主要技术参数 Main technical parameters::

型号Model No	ZF-TYP120	ZF-TYP90
适用产品尺寸 Tape size	Φ(80-100)xH(12 x 80)	Φ(40-80) xH(12 x 40)
工作气压 Cylinder air consumption	80psi, 6kg/cm ²	80psi, 6kg/cm ²
电压及功率 Power	3P 380V 50HZ /11KW	3P 380V 50HZ /10KW
套标速度/分钟 Speed	50-70包/packs	50-70包
机器尺寸 Machine size	4725(L)*2195(W)*1820(H)(mm)	4290(L)*1800(W)*1820(H)(mm)
包装产品类别 packed kinds	单个封箱胶带、布基胶带、美纹纸、双面胶 OPP, cloth, masking, double-adhesive tape	PVC电工胶带、文具胶带、和纸胶带等 PVC, stationery, paper tape
净重 Net weight	1500KG	1400KG

全自动枕式包装机 ZF-Z600XP/ZF-Z450XP

Full-automatic pillow packaging machine ZF-Z600XP/ZF-Z450XP



基本用途Basic Use :

主要用于单卷OPP胶带、文具胶带、双面胶带、泡棉胶带等单卷枕式包装。

It is mainly used for single roll pillow packing of single roll OPP tape, double sides adhesive, foam glue, stationery tape and so on.

产品特点Product characteristics :

- 全伺服控制（三个伺服），袋长即设即切，无需调节空走，一步到位，省事省膜。
- With servo control (three servos), bag length can be set and cut in one step, saving time and film
- 采用进口PCL及触摸屏控制，参数设定更便捷
- Control by imported PCL and touched screen, setting the parameter data much easier.
- 具有参数储存功能，可储存100种包装单位，更换产品更快捷，故障自诊断功能，故障显示一目了然
- It can store 100 kinds of packing parameters. Self failure diagnosis, clear failure displaying.
- 可用印刷膜包装，高感度光电眼色标跟踪，数字化输入封切位置，使封切位置更准确
- It can be packed by printed film. High sensitivity photocell, digital input of cutting and sealing position for extra accuracy
- 定位停机功能，不粘刀，不浪费膜
- Positioning stop function, not adhesive to cutters and no waste of packing film.
- 传动系统简洁，工作更可靠，维护保养更方便
- Simple driving system, more reliable and more convenient maintenance.
- 产品间距不对时，自动过滤，封口刀不封切，且切到产品自动反转，重启后直接开机方便操作，机器异常时，保护刀座，同时更安全。
- The sealing blade wont work and let the tape slip if the distance is wrong between two tapes. It will keep inversion station once the blade touching the tape. it is convenient to directly operate after reboot.
- 没有包装膜自动停机，更换膜更节约时间，又节省膜，大大提高操作效率
- Without packing film, it will stop working automatically. It will save time and film material to improve the operation efficiency

主要技术参数 Main technical parameters: :

型号 Model	ZF-Z600XP	ZF-Z450XP
包装范围 Pack size	Φ (80-220) x (5-72)	Φ (40-150) x (5-60)
包装速度 Speed	50-100包/min	80-150包/min
电压及功率 Power	1P 220V 50/60Hz/5.4KW	1P 220V 50/60Hz/4.4KW
机器尺寸 Machine size	5350 x 960 x 1370	4075 x 960 x 1400
包装种类 Packing kind	封箱胶带、双面胶、泡棉胶带等 BOPP, double-adhesive, foam tape	封箱胶带、双面胶、泡棉胶带等 BOPP, double-adhesive, foam tape
净重 Net weight	500KG	500KG

全自动风琴式包装机 ZF-TH700

Full-automatic spring packaging machine



基本用途Basic Use :

主要用于美纹纸胶带的风琴式包装。

It is mainly used for spring packing of crepe paper tape and single roll package.

产品特点Product characteristics :

- 最新专利产品，采用8轴水平旋转，简单操作，更换更简单
- The latest patented product adopts 8 axis horizontal rotation, which is easy to operate and convenient to replace products
- 最高速度达到8-10筒/分钟
- speed up to 8-10 barrel Maximum s per minute
- 上料模具采用不粘胶材料，重量轻，且成本低
- The feeding mould is made of non viscose material with light weight and low cost.
- 收缩风枪采用进口风枪，使用寿命长
- The contraction air gun adopts imported air gun and has long service life.
- 可连接自动分条机，实现从分条带包装一体化，节省人工成本，提高生产效率
- It can connect automatic splitting machine. It can realize automatic integration from dividing lines to package saving labor cost and improve production efficiency.

主要技术参数 Main technical parameters::

型号 Model No	ZF-TH700
适用产品尺寸 Tape size	直径 (90-150) x 单卷宽度 (12-72) Diameter (90-150) x Single width (12-72)
工作气压 Cylinder air consumption	80psi, 6kg/cm ²
封口刀尺寸 Blade size	700MM
最宽膜尺寸 max width film size	620MM
电压及功率 Power	3P 380V/50hz/11KW
包装速度/分 Speed/min	8-10筒/tower
机器尺寸 Machine size	4633 x 3745 x 1622
净重 Net weight	3000KG

半自动风琴包装机 ZF-XS700

Semi-automatic spring packaging machine ZF-XS700



产品特点Product characteristics :


- 最新专利产品，采用无轴包装方式，最新风琴包装封口设计，最新风琴包装专用收缩设计；简单操作，更换规格更简单；
- The newest patented product and using the packing way without any axis, the newest sealing design of the spring packaging, The newest shrinkage design of the spring packaging, it is very easy to operate and it will be much easier to change the specification
- 最高速度达到10-12筒/分钟
- Highest speed will be reach 10-12 towers/min
- 上料模具采用不粘胶材料；
- The feeding mould is made of non viscose material with light weight and lower cost.
- 收缩炉收缩，节省电费；
- Shrinkage by the shrink tunnel to save the power
- 可包装12MM及以上宽度的胶带。
- It can be used for the tapes whose width is over 12mm
- 封口刀可同时使用PE及PVC膜包装；
- Sealing blade can be used for the PE and PVC film at the same time.

主要技术参数 Main technical parameters: :

型号 Model No	ZF-XS700
适用产品尺寸 Tape size	直径 (90-150) x 单卷宽度 (12-72) Diameter (90-150) x single width (12-72)
工作气压 Cylinder air consumption	80psi, 6kg/cm ²
封口刀尺寸 Blade size	700MM
最宽膜尺寸 max width film size	620MM
电压及功率 Power	3P 380V/50hz/11KW
包装速度/分 Speed/min	10-12筒/tower
机器尺寸 Machine size	2400 x 1430 x 1620
净重 Net weight	750KG

全自动侧面搓滚贴标机 ZF-TBC150/全自动平面贴标机ZF-TBP150

Full-automatic side roller labeling machine ZF-TBC150/Full-automatic plain labeling machine ZF-TBP150

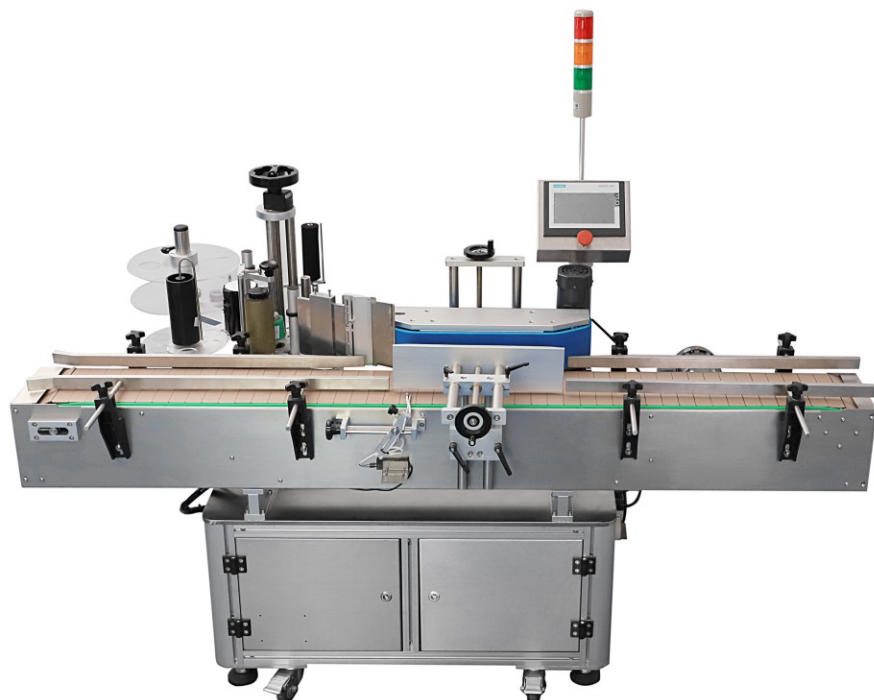

基本用途 Basic Use:

ZF-TBC150适用于单卷胶带或整筒大胶带侧面贴标，可全周贴标和半圆贴标

ZF-TBC150 It is suitable for side labeling of single roll tape or side labeling of large tape. It can be full circle labeling and semicircle labeling

ZF-TBP150适用于多卷胶带平铺的上平面贴标，单卷胶带的平面贴标以及纸箱上平面的贴标

ZF-TBP150 It is suitable for flat label on multi roll tape packing, flat paved label on singleroll tape and plain paved label on carton and so on.

产品特点 Product characteristics:


- 伺服马达控制，贴标精准。
- Servo motor control, accurate labeling.
- 最快贴标速度可达到100卷/分钟
- The fastest speed is 100 rolls/min
- 可单机生产，可连接流水线生产
- The whole machine can be used or connected to the production line.
- 输送带产品最大直径为150mm
- The max conveyor belt diameter is 150mm
- 标签最大直径350mm，标签尺寸L(15-150) x W(15-150)
- Max labeling diameter is 350mm, labeling size is L (15-150)

主要技术参数 Main technical parameters: :

型号 Name/Model	ZF-TBC150	ZF-TBP150
适用范围直径 x 高度 Diameter x height	(85-150) x (15-150)	L(50-500) x W(50-400) x H(10-150)
电压及功率 Power	1P 220V/50HZ /0.4KW	1P 220V/50HZ /0.4KW
机器尺寸 Machine size	2000 x 970 x 1465	2000 x 880 x 1650
贴标速度/分钟 Labeling speed/ min	40-100包/packs	40-100包/packs
净重 Net weight	240KG	220KG

全自动多功能卧式贴标机 ZF-TBW400/TBS150

Full-automatic cylinder horizontal labeling machine ZF-TBW400/TBS150

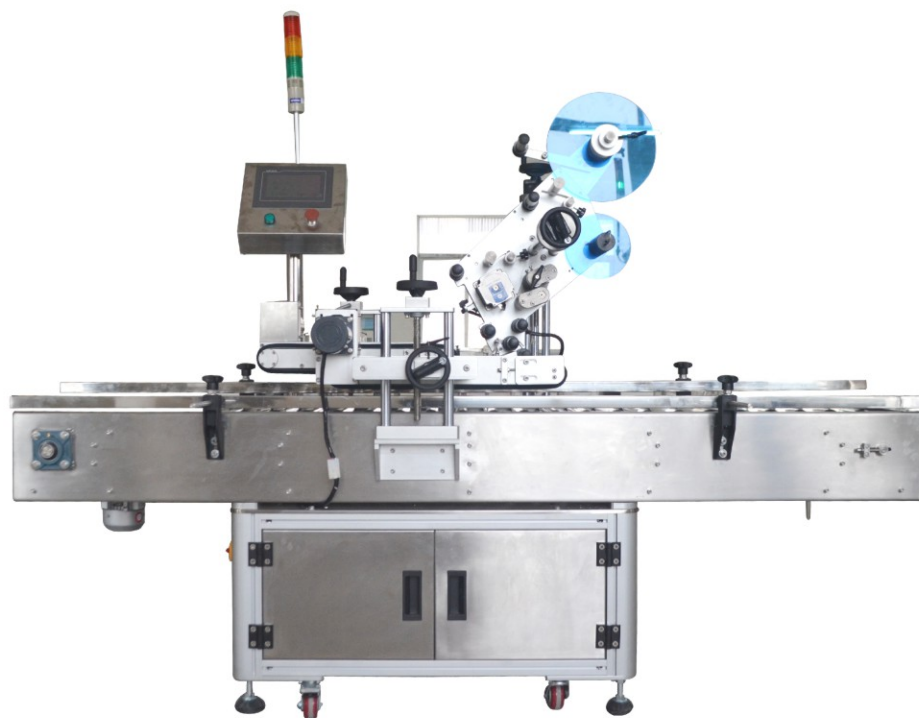


TBW400产品特点Product characteristics :

- 伺服马达控制，贴标精准。
- Servo motor control, accurate labeling
- 可实现整筒文具胶，整筒封箱胶带，6卷平包装，及单卷封箱胶带，4种贴标功能
- It can be used to complete the whole cylinder stationery tape, the whole box sealing tapes, 6 rolls of flat packing and single box tape. It adopts horizontal transmission, horizontal labeling to increase its stability and improve the labeling efficiency.
- 可接在包装机后面，形成自动化包装生产线
- It can be connected to the packaging machine to form an automatic packaging production line.
- 标签最大直径350mm 标签尺寸L(15-150) x W(15-150)
- Maximum label diameter: 350mm, label size: L(15-150) x W (15-150)

TBS150产品特点Product Characteristics:

- 伺服马达控制，贴标精准。
- Servo motor control, accurate labeling
- 功能强大，一次性贴两面标签，简化工艺，提高生产效率；
- The function is powerful in one-time labeling. The process is simplified and the production efficiency is improved.
- 应用灵活，各个贴标头，可独立控制，可分别贴一面或两面；
- The application is flexible. Each labeling header can be controlled independently and can label one or both sides.

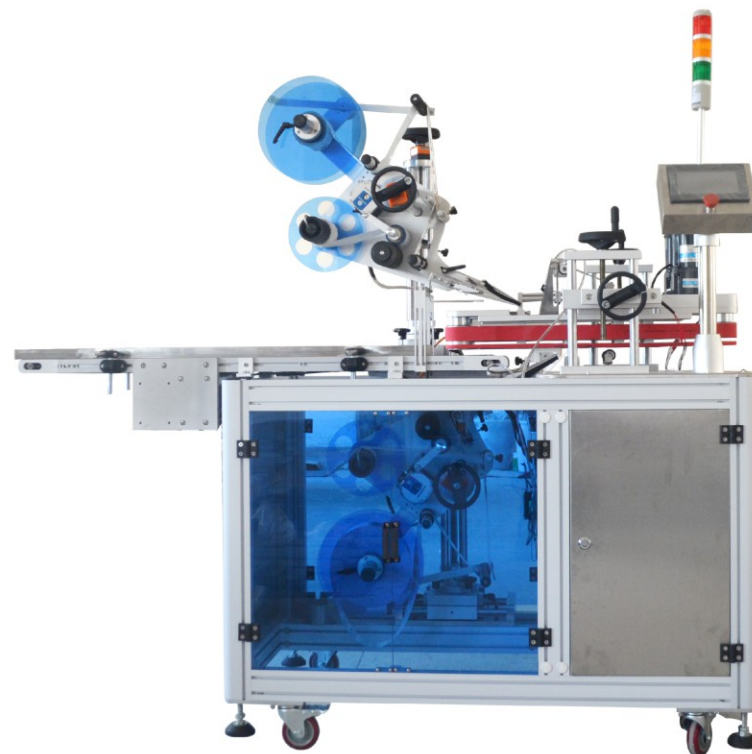

主要技术参数 Main technical parameters: :

型号 Name/Model	ZF-TBW400	ZF-TBS150
适用范围直径 x 高度 Scope of application x height	(40-150) x (45-360)	Φ(40-150)×H(15-150)
电压及功率 Power	1P 220V/50HZ /0.4KW	1P 220V/50HZ /0.6KW
机器尺寸 Machine size	1500x 980 x 1595	2000×1200×1900
贴标速度/分钟 Labeling speed/ min	40-100包/packs	40-100包/packs
净重 Net weight	360KG	320KG

工字型封箱机

I - Shaped box sealing machine



配套在全自动包装机后面实现自动封箱，大大节省了人工，降低了劳动强度，提高了生产效率。

This product is installed to the automatic packaging machine to achieve automatic sealing, greatly saving labor, reducing the labor intensity, and improving the production efficiency.

主要技术参数 Main technical parameters::

设备名称 Device name	手动折盖封箱机 Manual folding and sealing machine	自动折盖封箱机 Automatic folding and sealing machine	L型半自动角边封箱机 L-type semi-automatic corner sealing machine
型号 Name/Model	ZF-FA500	ZF-FC500	ZF-FG500L
适用范围 L x W x H Scope of application L x W x H	L(150-1000) x W(120-500) x H(150-500)	L200-600*W120-500*H120-500mm	L340-500*W200-500*H180-500mm
工作气压Cylinder air consumption	—	80psi, 6kg/cm ²	80psi, 6kg/cm ²
电压及功率 Power	1P 220V/50HZ /0.4KW	1P 220V/50HZ /0.2KW	1P 220V/50HZ /0.2KW
机器尺寸 Machine size	L1000*W880*H1330mm	L1700*W930*H1510mm	L1910*W1150*H1500mm
速度 箱/分钟 Speed Box/ min	6-10Box/min	10-15Box/min	6-10Box/min
净重 Net weight	120KG	180KG	440KG

自动开箱机

Automatic unpacking machine



特性说明：

- 有无胶带及无纸板箱报警功能
- Alarm function with or without tape and cardboard boxes
- 储箱机构：一次大概可放置50个未成型的纸箱（根据纸箱厚度而定），并可随时补充
- Storage box mechanism: about 50 unformed cartons can be placed at a time (depending on the thickness of the cartons)
- 工作流程：吸箱—开箱—折合前后纸盖—折合左右纸盖—封合底部
- Work flow: suction box - Open Box - paper cover before and after folding - paper cover around folding - sealing bottom
- 配套在全自动包装机后面实现自动开箱，大大节省了人工，降低了劳动强度，提高了生产效率。
- This product is installed to the automatic packaging machine to achieve automatic unpacking, greatly saving labor, reducing the labor intensity, and improving the production efficiency.


主要技术参数 Main technical parameters:：

型号 Name/Model	ZF-K20TX
适用范围 L x W x H Scope of application L x W x H	280≤L≤500mm 160≤W≤400mm 510≤L+W≤1000mm 300≤H+W/2≤620mm
工作气压Cylinder air consumption	80psi, 6kg/cm ²
电压及功率 Power	1P 220V/50HZ /0.4KW
机器尺寸 Machine size	L2050*W1950*H1450mm
速度 箱/分钟 Speed Box/ min	6-10Box/min
净重 Net weight	400KG

收缩膜

Shrink film

POF收缩膜/ Shrink film

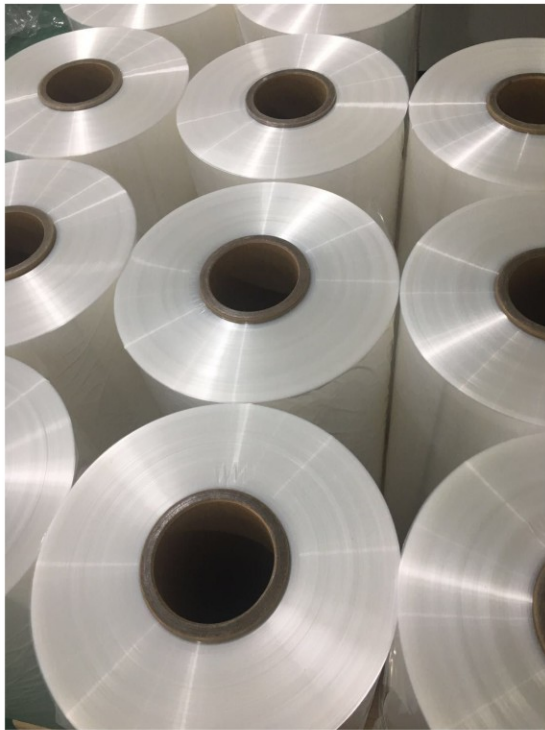

用途：工艺品，相框等木制品，玩具，杀虫剂，日用品，食品，化妆品，罐装饮料，乳制品，医药，盒带及录像带等产品

Usage: Arts and crafts, photo frames and other wood products, toys, pesticides, daily necessities, food,

产品特点Product Characteristics:

- 透明度好、易收缩、强度高、
- 收缩率可以根据用户需要自由调整，可操作性强.

POF Shrink film characteristics:

- Good transparency, easy to shrink, high strength.
- The shrinkage rate can be adjusted freely according to the user's needs, and good at operation

PVC、PET收缩膜/ Shrink film



产品特点Product Characteristics:

- 防雨、防潮、防霉。

PET Heat shrink film characteristics:


- Waterproof, moisture-proof, anti-mildew.

用途：PET热收缩膜常用于方便食品、饮料市场、电子 电器、金属制品，特别是收缩标签是其最主要的应用领域。

Usage：PET heat shrink film is commonly used in the convenient food, beverage, electronic appliances, metal products; especially the shrink label is its most important application areas.

包装生产线示意图

Sketch map of packaging production line

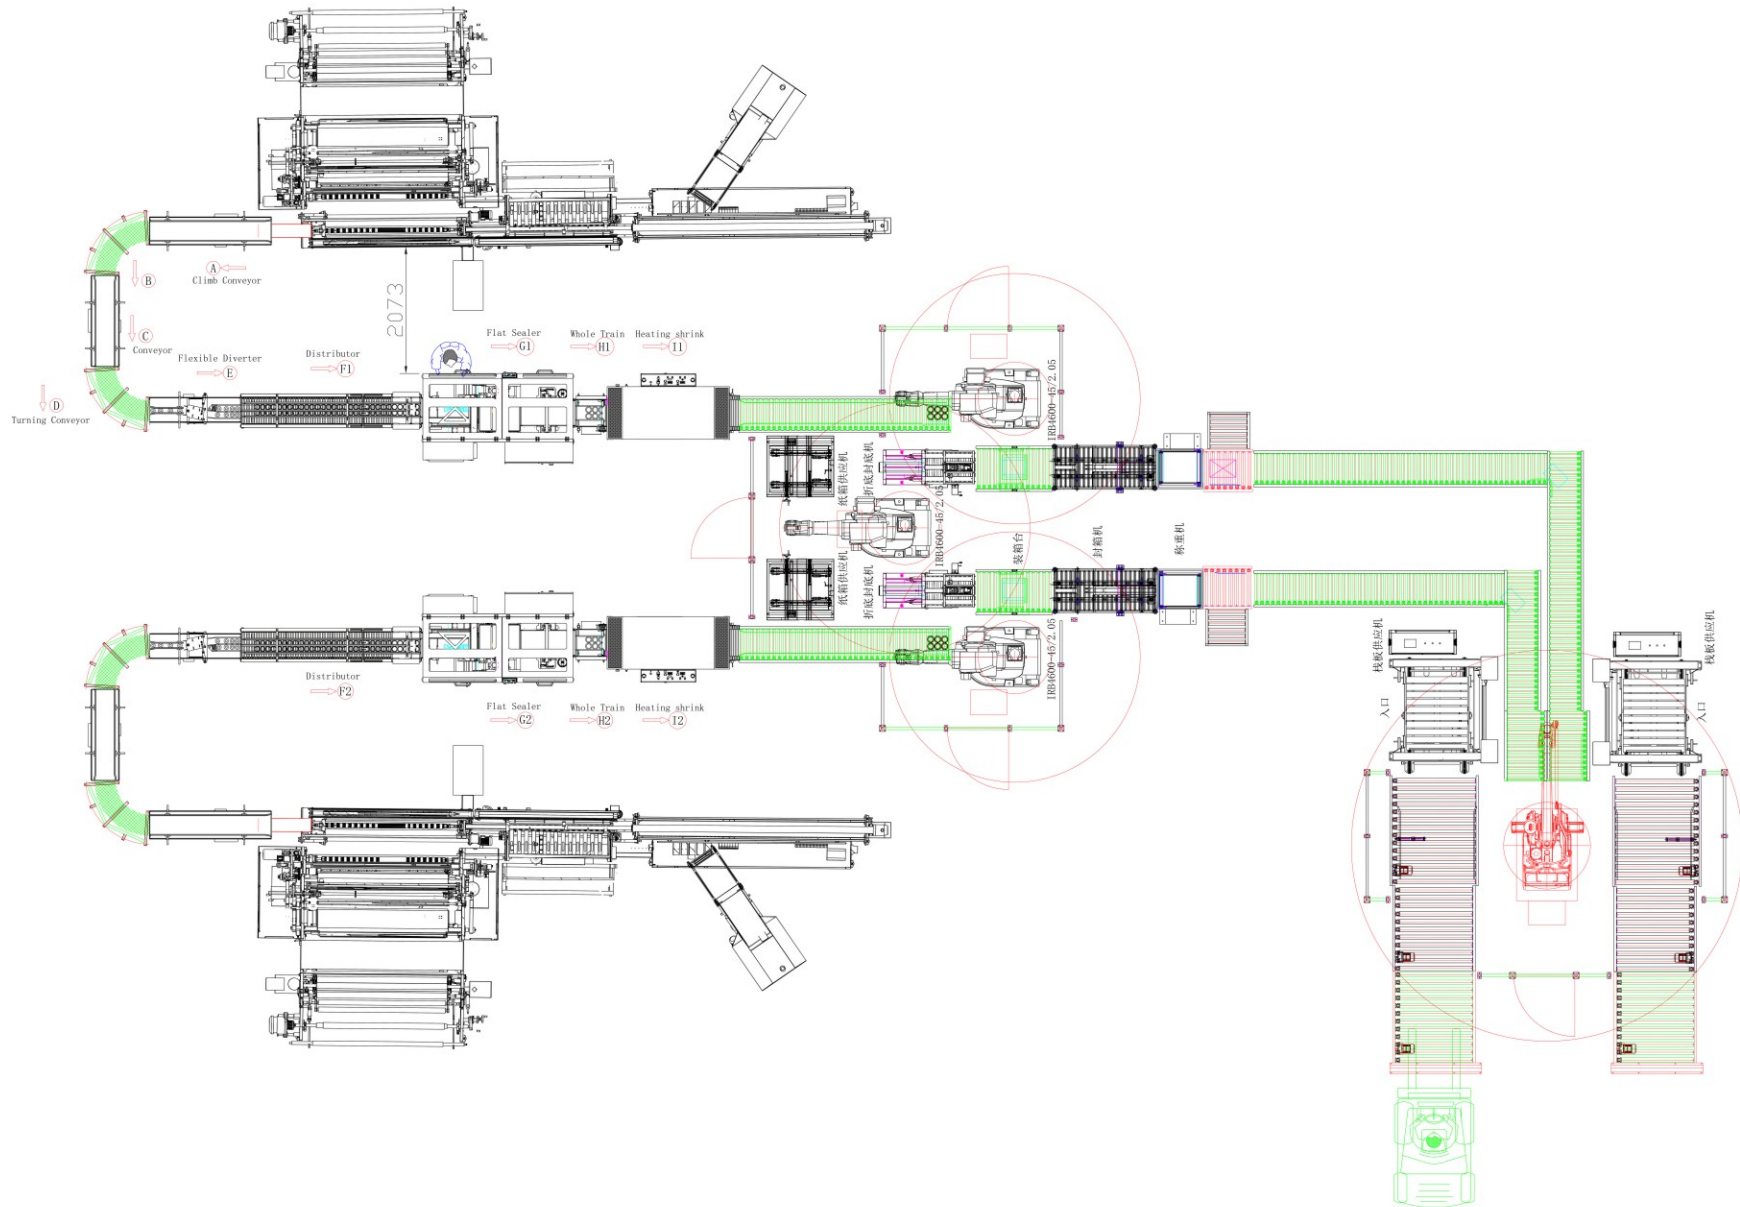

可根据客户生产车间布局、生产工艺要求设计定制个性化的包装生产线

According to the customer's workshop production layout and process requirements, design and customize an individualized



深圳市众富包装科技有限公司

SHENZHEN ZHONGFU PACKAGING TECHNOLOGY CO., LTD.

地址：深圳市龙岗区坪地街道坪西社区龙岗大道1032号A1101B

Add: A1101B, 1032 Longgang Avenue, Pingxi Community, Pingdi Street, Longgang District, Shenzhen

众富包装科技（惠州）有限公司

Zhongfu Packaging Technology (Huizhou) Co., Ltd

地址：广东省惠州市惠阳区梅龙湖智能产业园二期13栋

Add: Building 13, Phase II, Meilonghu Intelligent Industrial Park, Huiyang District, Huizhou City, Guangdong Province